

EOLS-PX-GU-20 Series

Compliant with ITU-TG.987.2 XGPON N2a class
 Single fiber bi-directional Transceiver
 2.48832Gbps upstream and 9.95328Gbps downstream
 RoHS6 Compliant

Features

- ◆ SFP+ Package with SC Receptacle
- ◆ Single +3.3V Power Supply
- ◆ 2.48832 Gbps / 1270 nm Burst-Mode
 Transmitter with DFB laser
- ◆ 9.95328Gbps / 1577nm High Sensitivity
 Continuous-Mode APD-TIA Receiver
- ◆ LVTTTL Tx_Burst, Tx_SD, LOS
- ◆ LVTTTL Sleep Mode for Power Consumption
- ◆ Operating Case Temperature
 Standard: 0°C~+70°C
 Industrial: -40°C~+85°C
- ◆ Compliant with Class 1 FDA and IEC60825-1
 laser safety
- ◆ Compliant with SFF-8472 MSA
- ◆ Compliant with SFF-8432 MSA



Applications

- ◆ XGPON N2 Class

Ordering information

Part No.	Input	Output	Burst-mode	Fiber	Interface	Temp.
EOLS-PX-GU-20-1 ^{*note1}	AC	AC	LVTTTL	SMF	SC	Standard
EOLS-PX-GU-20-I1	AC	AC	LVTTTL	SMF	SC	Industrial

Note1: Standard version

*The product image only for reference purpose.

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-40	+85	°C
Supply Voltage	V _{cc}	-0.5	4.0	V
Operating Relative Humidity	Hopr	5	95	%

Note2: Exceeding any one of these values may destroy the device permanently.

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	
Operating Case Temperature	T _c	EOLS-PX-GU-20-1	0		+70	°C
		EOLS-PX-GU-20-11	-40		+85	
Power Supply Voltage	V _{cc}	3.15	3.3	3.45	V	
Power Supply Current	I _{cc}			450	mA	
Surge Current	I _{surge}			+30	mA	
Data Rate	@ Tx side		2.48832		Gbps	
	@ Rx side		9.95328			

Performance Specifications - Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Transmitter						
CML Inputs(Differential)	V _{in}	100		1000	mVpp	AC coupled inputs
Input Impedance (Differential)	Z _{in}	85	100	115	ohm	
Tx_Burst_Enable Input Voltage	H	2		V _{cc}	V	
	L	0		0.8	V	
Tx_FAULT Output Voltage	H	2.4		V _{cc} +0.3	V	Transmitter Fault Triggered
	L	0		0.4	V	
Tx_SD Output Voltage	H	2.4		V _{cc} +0.3	V	Laser on indicator
	L	0		0.4	V	Laser off indicator
TX Fault Assert Time	T _{fault_assert}	-		50	ms	
TX Fault Reset time	T _{fault_reset}	10			us	
Receiver						
CML Outputs (Differential)	V _{out}	340		900	mVpp	AC coupled outputs
Output Impedance (Differential)	Z _{out}	80	100	120	ohm	

Rx_LOS Output Voltage	H	2.4		V _{cc} +0.3	V	
	L	0		0.4	V	
Rx_LOS Assert time	T _{assert}	-		100	us	
Rx_LOS De-Assert time	T _{De-assert}	-		100	us	

Performance Specifications - Optical

Parameter	Symbol	Min.	Typical	Max.	Unit
Data Rate	@Tx		2.48832		Gbps
	@Rx		9.95328		
Transmitter					
Centre Wavelength	λ_c	1260		1280	nm
Spectral Width (-20dB)	$\Delta\lambda$			1	nm
Side Mode Suppression Mode	SMSR	30			dB
Average Output Power*(note3)	P _{out}	+2		+7	dBm
Extinction Ratio*(note4)	ER	8.2			dB
Optical Return Loss Tolerance				15	dB
Rise/Fall Time(20%~80%)	tr/tf			140	ps
Total Jitter(PRBS2 ⁷ -1)	T _J			0.2	UI
Output Optical Eye*(note5)	ITU-T G987.2 Compliant				
Optical Output Power with TX OFF*(note6)	P _{off}			-40	dBm
Receiver					
Centre Wavelength	λ_c	1575	1577	1580	nm
Receiver Sensitivity*(note7)	P _{min}			-28	dBm
Saturation Optical Power	P _{max}	-8			dBm
Receiver Reflectance	CR			-20	dB
LOS De-Assert	LOSD			-29	dBm
LOS Assert	LOSA	-42			dBm
LOS Hysteresis*(note8)		0.5		6	dB
WDM Filter ISO	ISO(1560)		35		dB
	ISO(1600)		35		
RSSI resolution @ Full temperature range		-3		+3	dB



Note3: Output is coupled into a 9/125 um single-mode fiber.

Note4: Filtered, Measured with PRBS2²³-1 test pattern @2.48832Gbps.



Note 7: Measured with a PRBS 2³¹-1 test pattern @9.95328Gbps and ER=8.2 dB, BER is less than 1E-3.

Note5: Eye pattern mask

Note 8: LOS Hysteresis

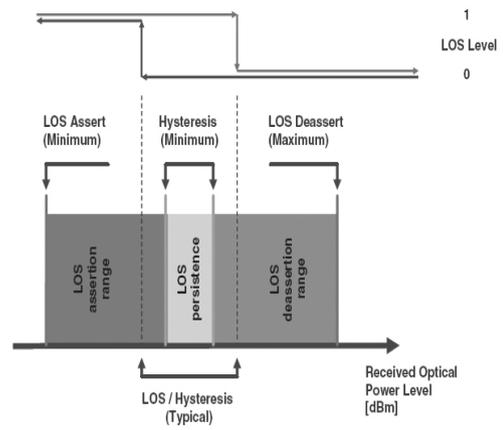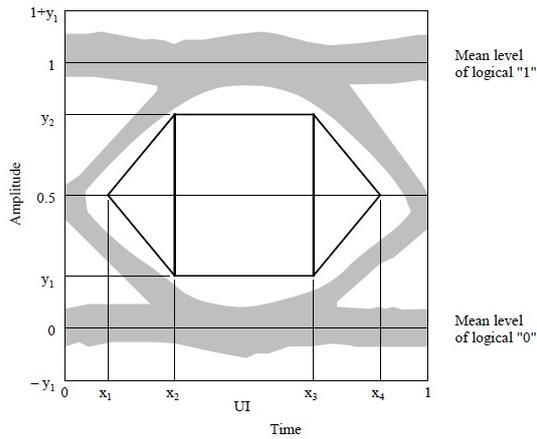

SFP+ Transceiver Electrical Pad Layout

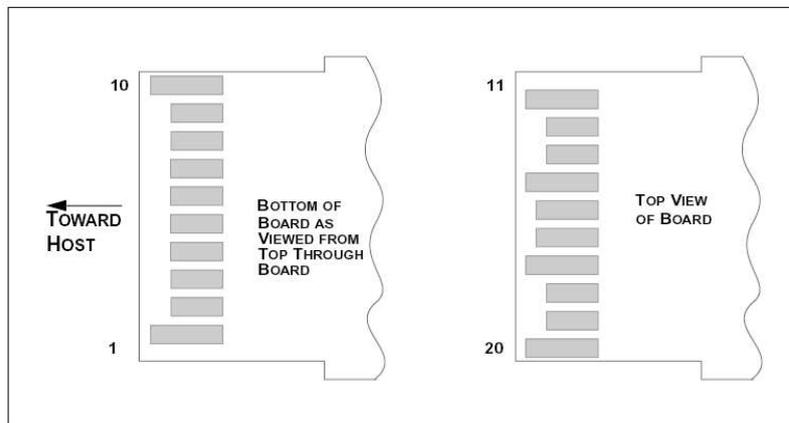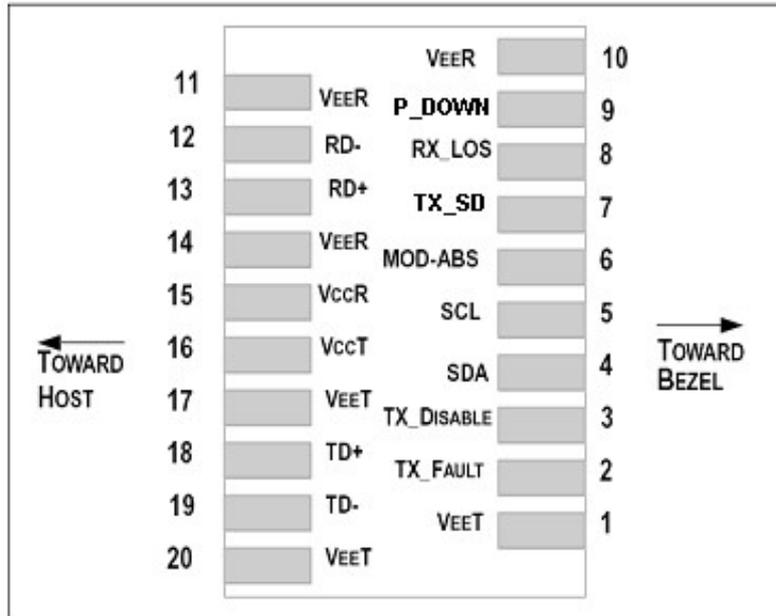

Pin Function Definitions

Pin Num.	Name	FUNCTION	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 15
2	TX Fault	Transmitter Fault Indication	3	Note 9
3	TX_Burst_Enable	Burst Enable	3	Note 10, Module disables on high or open
4	SDA	Module Definition 2	3	Note 11, Data line for Serial ID.
5	SCL	Module Definition 1	3	Note 11, Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 11
7	TX_SD	TX signal detector (LVTTL)	3	Note 12
8	RX_LOS	Loss of Signal	3	Note 13
9	P_Down	Power down (LVTTL)	3	Note 14
10	VeeR	Receiver Ground	1	Note 15
11	VeeR	Receiver Ground	1	Note 15
12	RD-	Inv. Received Data Out	3	Note 16
13	RD+	Received Data Out	3	Note 16
14	VeeR	Receiver Ground	1	Note 15
15	VccR	Receiver Power	2	3.3 ± 5%, Note 17
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 17
17	VeeT	Transmitter Ground	1	Note 15
18	TD+	Transmit Data In	3	Note 18
19	TD-	Inv. Transmit Data In	3	Note 18
20	VeeT	Transmitter Ground	1	Note 15

Notes:

Note9: TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

Note10: TX_Burst_Enable is an input that is used to open the transmitter burst optical output. It is pulled up within the module with a 4.7 – 10 KΩ resistor. Its states are:

Low (0 – 0.8V): Default Transmitter burst on

(>0.8, < 2.0V): Undefined

High (2.0 – 3.465V): Default Transmitter burst off

Note11: SDA/SCL is the 2 wire serial interface, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. MOD_ABS is GND internal, which should be pulled up with a 4.7K – 10KΩ resistor on the host board, high indicates module is absence.

Note12: TX_SD is the indicator of TX signal. High indicates laser on, low indicates laser off.

Note13: LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor. Assert high when the input optical power below the threshold.

Note14: Internal pulled up with a 4.7K – 10KΩ resistor internal. P_Down is a controller PIN for saving power consumption. If not use this feature, main board connection should be NC.

Low (0 – 0.8V): TX power saving is on and transmitter will be set to sleep mode.

(>0.8, < 2.0V): Undefined

High (2.0 – 3.465V) or NC: TX power saving off


Note15: VeeR and VeeT may be internally connected within the SFP+ module.

Note16: RD-/+ : These are the differential receiver outputs. They are AC coupled internal.

Note17: VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP+ connector pin. Maximum supply current is 600Ma. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP+ input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP+ transceiver module will result in an inrush current of no more than 30Ma greater than the steady state value. VccR and VccT may be internally connected within the SFP+ transceiver module.

Note18: TD-/+ : These are the differential transmitter inputs. They are AC-coupled inside the module.

TX_SD Timing Sequence

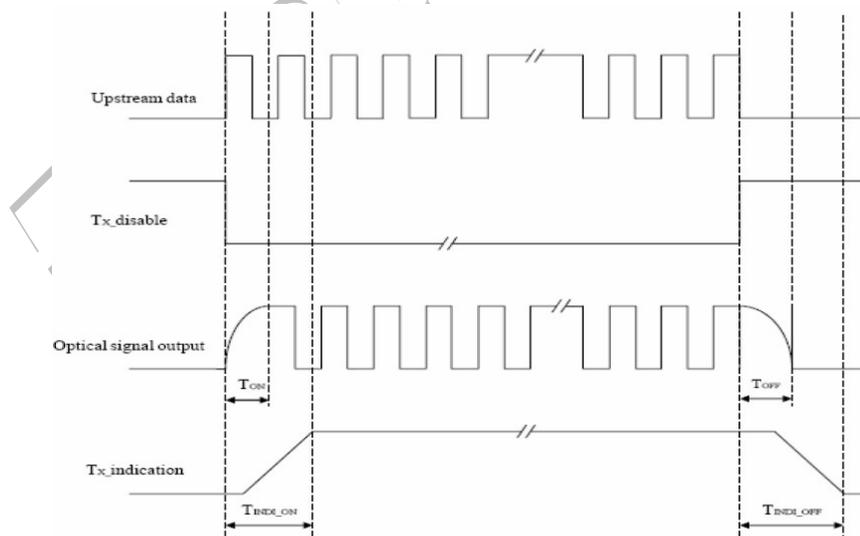


Parameter	Symbol	Min	Typ	Max	Unit
Tx_indication assert	Tindi-on			200	ns
Tx_indication deassert	Tindi-off			200	ns
Tx_burst on	Ton			12.8	ns
Tx_burst off	Toff			12.8	ns

EEPROM

The serial interface uses the 2-wire serial CMOS EEPROM protocol defined for the ATMEL AT24C02/04 family of components. When the serial protocol is activated, the host generates the serial clock signal (SCL). The positive edge clocks data into those segments of the EEPROM that are not writing protected within the SFP+ transceiver. The negative edge clocks data from the SFP+ transceiver. The serial data signal (SDA) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.


The Module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented. If the module is defined as external calibrated, the diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 at wire serial bus address A2h. The digital diagnostic memory map specific data field define as following .For detail EEPROM information, please refer to the related document of SFF 8472 Rev 10.2.

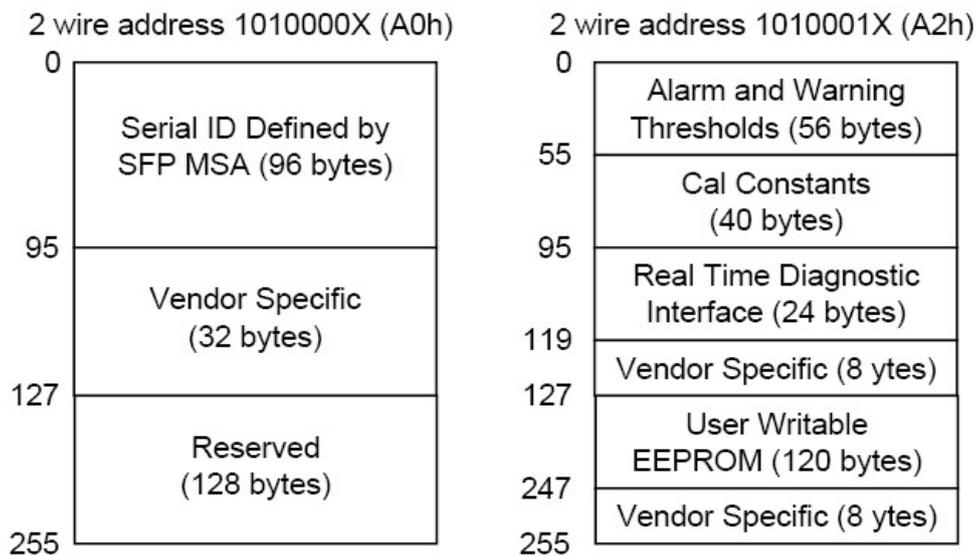


Digital Diagnostic Monitor Specification

Address	Parameter	Range	NOTES
96-97	Temperature	-40 to 125°C	Case temperature
98-99	Vcc Voltage	0V to 6.55V	
100-101	Bias Current	0 to 131Ma	Unit 2uA
102-103	TX Power	-40 to 8.2 dBm	Unit 0.1uW
104-105	RX Power	-40 to 8.2 dBm	Unit 0.1uW

Recommend Circuit Schematic

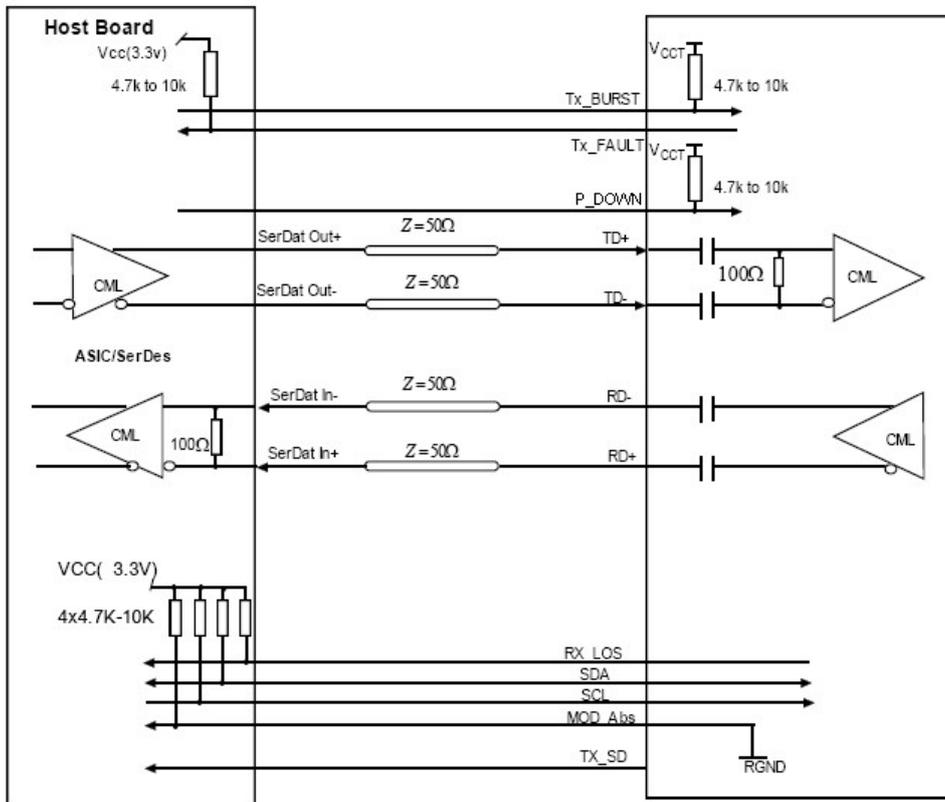

Mechanical Specifications

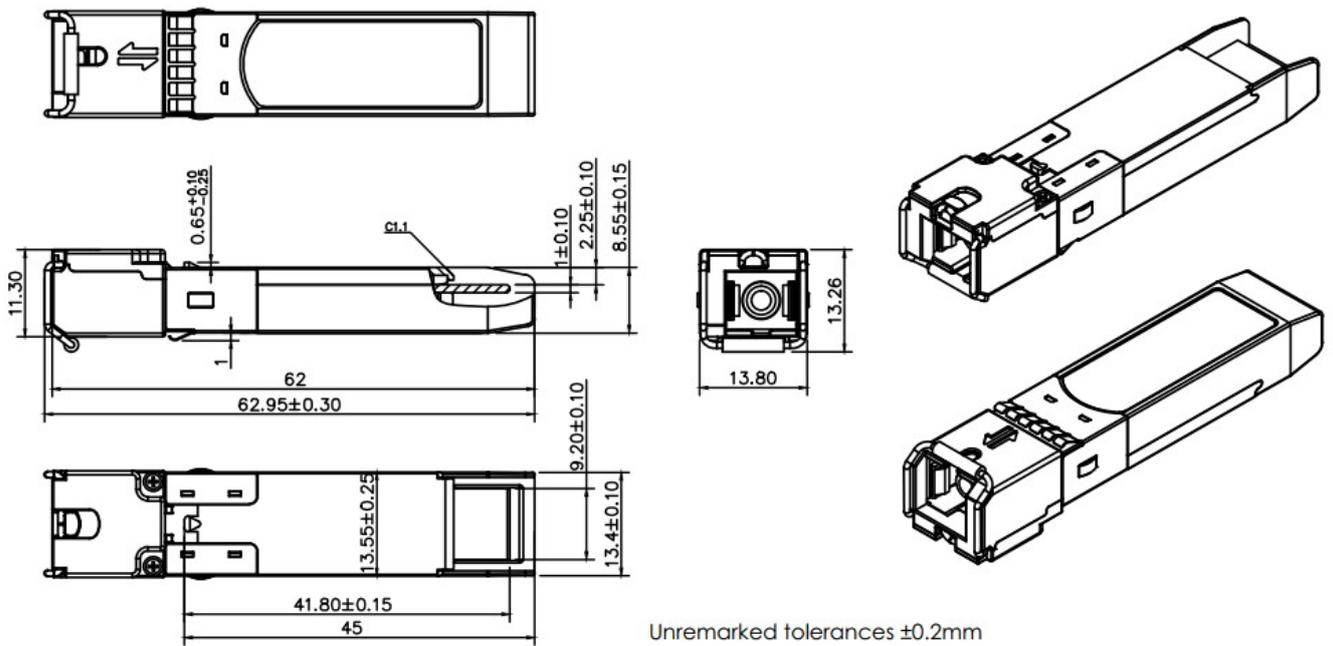

*This 2D drawing only for reference, please check with Eoptolink before ordering.

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Obtaining Document

You can visit our website: <http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. Listed at the end of the documentation to get the latest document.

Revision History

Revision	Initiated	Reviewed	Approved	DCN	Release Date
V1.a	Arvin/Phlio			Preliminary Released.	Aug.22, 2011
V1.b	Phlio	Kelly		Update PN to EOLS-PX-GU-20.	Nov 28, 2011
V1.c	Angela	Kelly		Update LOSD&LOSA	Nov 16,2012
V1.d	Angela	Kelly	Phlio	Update regulatory compliance and page header	Jan 17,2014
V1.e	Angela	Kelly		Update a slip of the pen.	Feb 25,2014
V1.f	Angela	Kelly	Phlio	Update the regulatory compliance and Max lcc.	Sep 18 2015
V1.g	Angela	Kelly/Vina/ Dean/Lyn/ Jason/Nygai	Phlio	Update regulatory compliance, LOSD, ER of the sensitivity test conditions and 2D drawing. Add the industrial temperature.	May 17,2016
V1.h	Angela	Kelly/Vina/ Dean/Lyn/ Jason/Nygai	Phlio	Correct LOS pin description and the 2D drawing.	Jan 17,2017

Notice:

Eoptolink reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

Add: Floor 5 Building 2 No. 21 Gaopeng Avenue High-Tech District CHENGDU, SICHUAN 610041
P.R. CHINA

Tel: (+86) 028-85122709 ext 808 & 809

Fax: (+86) 028-85121912

Postal: 610041

E-mail: sales@eoptolink.com

<http://www.eoptolink.com>

EOPTOLINK