


## ETRRExF25VKxF3JKGHGIGx

With 25G EML laser diode and 25G APD-TIA transmission.

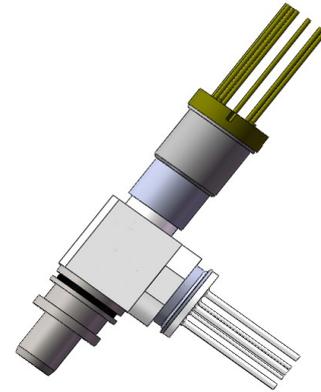

### Features

- ◆ Case operating temperature range: -40 to 85°C
- ◆ High slope efficiency and high output power
- ◆ High sensitive APD-TIA
- ◆ ROHS compliant products available

### Applications

- ◆ 50G PAM4 application

### Absolute maximum ratings(Tc=25°C,unless otherwise noted) <sup>\*Note1</sup>

Parameter	Symbol	Min	Max	Unit
Storage temperature	T <sub>ST</sub>	-40	85	°C
Operating temperature	T <sub>OP</sub>	-40	85	°C
Storage and operating humidity	RH	5	85	%
LD reverse voltage	V <sub>RL</sub>	--	2	V
LD forward current	I <sub>FL</sub>	--	200	mA
APD supply voltage	V <sub>APD</sub>	--	V <sub>br</sub>	V
APD reverse current	I <sub>RD</sub>	--	1	mA
TIA supply voltage	V <sub>CC</sub>	-0.5	4	V

\*Note1: Exceeding any one of these values may destroy the device immediately.

## Transmitter optical and electrical characteristics

(Unless specified else, the specifications below are defined at Tc=25°C)


Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Threshold current	I <sub>th</sub>	--	15	30	mA	TEC =53°C
Laser output optical power	P <sub>f</sub>	4	--	--	mW	I <sub>op</sub> =85mA、TEC=53°C、
LD Forward voltage	V <sub>f</sub>	--	1.3	2.0	V	I <sub>op</sub> =85mA、TEC=53°C、
Center wavelength	λ <sub>c</sub>	1281	--	1297	nm	Tc=-40~85°C
		1306	--	1322		
Side-mode suppression ratio	SMSR	35	--	--	dB	CW
Tracking Error	TE	-1.5	--	+1.5	dB	Tc=-40~85°C

## Receiver optical and electrical characteristics

(Unless specified else, the specifications below are defined at Tc=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Supply voltage	V <sub>cc</sub>	2.9	3.3	3.5	V	
TIA supply current	I <sub>cc</sub>	--	58	70	mA	V <sub>cc</sub> =3.3V
Breakdown voltage	V <sub>br</sub>	22	--	32	V	I <sub>d</sub> =100uA
Breakdown voltage Temperature Coefficient	dV <sub>br</sub> /dT	--	13	--	mV/°C	Tc=-40~85°C
Responsivity	R	5	7	--	A/W	V <sub>br</sub> -3V, Pin=-20dBm
Dark current	I <sub>d</sub>	--	--	1500	nA	V <sub>br</sub> -3V
Receiving wavelength	λ	1281	--	1297	nm	Tc=-40~85°C
		1306	--	1322		
Optical sensitivity(OMA)	Sen	--	--	-15.1	dBm	
Receiver reflectance	R	--	--	-26	dB	


## Package dimension\*Note2

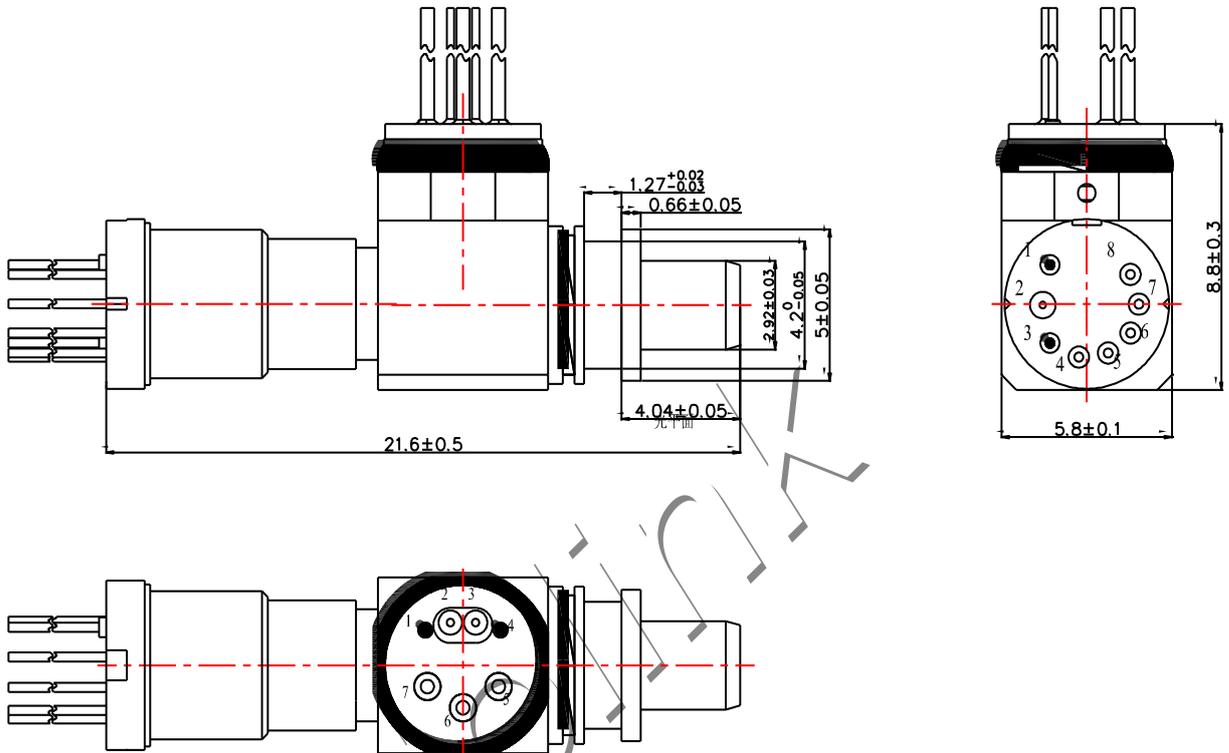

Note2: PIN direction and laser mark can be customized.

## Pin assignment


TYPE: 22

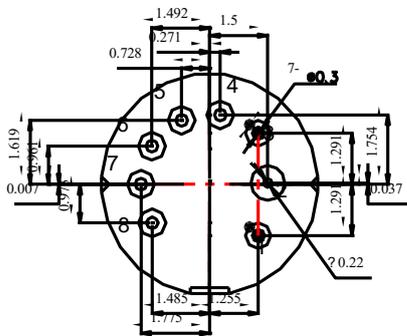

LD-pin-22/ TYPE:V

- 1 GND
- 2 RF
- 3 GND
- 4 TEC+
- 5 TEC-
- 6 NC
- 7 Bias
- 8 Therm

TYPE: J

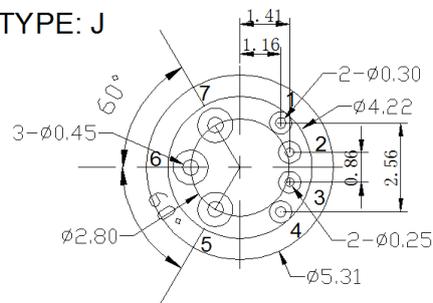

APD-pin-J

- 1 GND
- 2 Dout (-)
- 3 Dout (+)
- 4 GND
- 5 Vcc
- 6 VGC
- 7 Vapd

## Ordering information (standard version) <sup>\*Note3</sup>

Part No	Laser type	transmitter/receiver
ETRREBF25VKCF3JKXGHGIGN	EML	1290T/1310R
ETRREBF25VKCF3JKXGHGIGR	EML	1290T/1310R
ETRRECF25VKBF3JKXGHGIGN	EML	1310T/1290R
ETRRECF25VKBF3JKXGHGIGR	EML	1310T/1290R

Note3: For more ordering information, please refer to nomenclature or contact EOPTOLINK sales.

ETRR

A B C D E F G H I J K L M N O P Q

Code	Parameter	Detailed description	
A	Laser type	E=EML	
B	Launch wavelength	B=1290nm	C=1310nm
C	Launch data rate	F=50Gbps	
D	Output power	25≥4mw	
E	TX pin type	V= LD-pin-22	
F	TX chip type	K=Eoptolink	
G	Receiver wavelength	C=1310nm	B=1290nm
H	Receiver data rate	F=50Gbps	
I	TIA voltage	3=3.3V	
J	RX pin type	J=APD-TIA-pin-J	
K	RX chip type	K=Eoptolink	
L	Connector	X=LC connector	
M	TX pin package direction	G	
N	RX pin package direction	H	
O	Isolator	G=with I	
P	Insulation	Blank= Routine receptacle	
Q	TIA model	GN=GN1089	GR=GN1700

## Precaution

- 1) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- 2) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- 3) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

## Revision history

Verision	Initiated	Reviewed	Approved	Revision history	Release date
Va-1	Marco	James	Vincent	Initial	2022.8.29
Va-2	Marco	James	Vincent	Modify operating temperature、responsivity and test conditions	2022.12.1
Va-3	Marco	James	Vincent	Update specs and the LD pin assignment	2023.7.29

### Notice:

Eoptolink reserves the right to make changes or discontinue any product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

### Contact:

Add: No.127 West Wulian Street, Shuangliu District, Chengdu, 610213, P.R. CHINA

Tel: (+86) 028-67087999

Fax: (+86) 028-67087979

E-mail:sales@eoptolink.com

<http://www.eoptolink.com>