

GPTR-91xxx

2.5Gbps PIN-TIA Receiver Modules (Receptacle Module)



Features

- ◆ High sensitivity
- ◆ Differential ended output
- ◆ Single +3V、+5V、3.3/5V operation
- ◆ Trans-impedance amplifier with AGC
- ◆ RoHS Compliant Products Available

Applications

- ◆ 2.5Gbps Bit Rate application
- ◆ Fast Ethernet receiver/transceiver application

General

GPTR-91xxx Series is a TO-based 2.5Gps, 4 pin or 5 pin PIN-TIA. It provides high sensitivity with AGC and 100ohm differential outputs. A photodiode is mounted into a low capacitance coaxial package integrated with a receptacle.

Ordering Information (Standard version ^{*Note1})

Part No.	Wavelength (nm)	Voltage (V)	Package	Pin Type	Insulation
GPTR-9130B	1270~1620	3.3	B	A	N
GPTR-913DE	1270~1620	3.3	E	D	N
GPTR-915EE	1270~1620	5	E	E	N
GPTR-9130FJ	1270~1620	3.3	F	F	Y

*Note1: For more ordering information, please refer the nomenclature and contact EPOTOLINK sales.

Absolute maximum ratings


Parameter	Min	Typ.	Max	Unit
Storage Temperature	-40	25	85	°C
Operating Temperature	-40	25	85	°C
TIA Supply Voltage	3.1	3.3	3.5	V
	4.5	5	5.5	
PD Reverse Voltage	-		15	V
Operation Relative Humidity	-		85	%
Soldering Temperature / Time	-		260/10	°C/s

Electrical and optical characteristics


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Operating Wavelength	λ	1270		1620	nm	
Supply Current	I _{cc}			40	mA	No Loads
Saturation Power	P _{sat}	-3	0	-	dBm	VR=5V, 25°C
Small-Signal Bandwidth	BW	1.65			MHz	at -3dBm
Sensitivity			-23	-21	dBm	$\lambda=1310\text{nm}, 2.5\text{Gbps},$ BER=10 ⁻¹⁰ @ PRBS= 223-1
Output Resistance	R _o		50		Ω	
Rise /FallTime	T			4.5		10~90%

Pin Assignment *Note2


TYPE: A

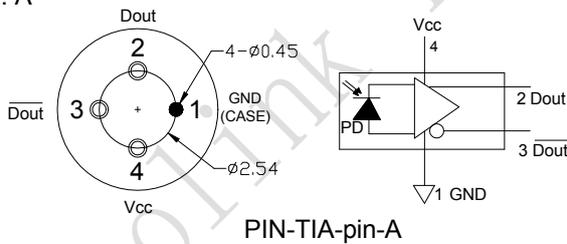

TYPE: D

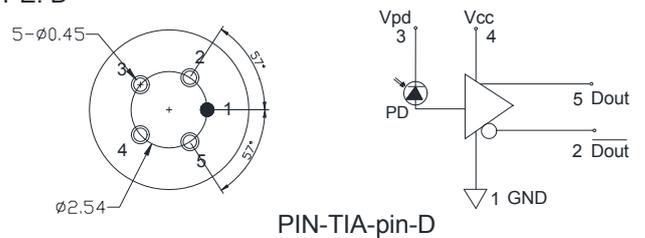


TYPE: E

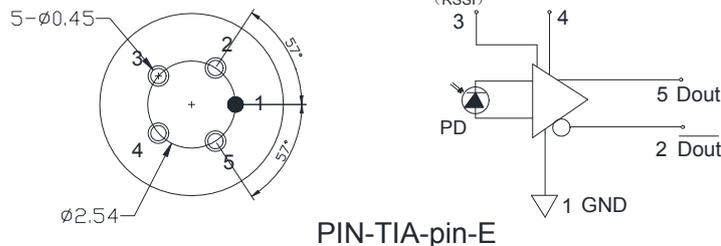



Note2: Other Pin type can be customized.

Receptacle Package series

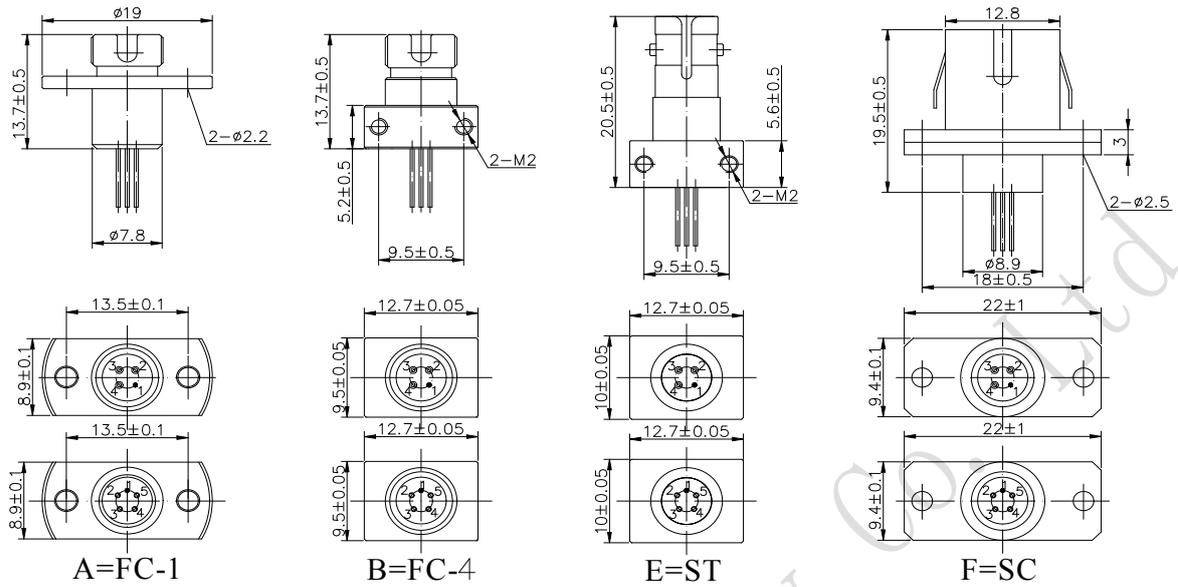


The direction of fix card

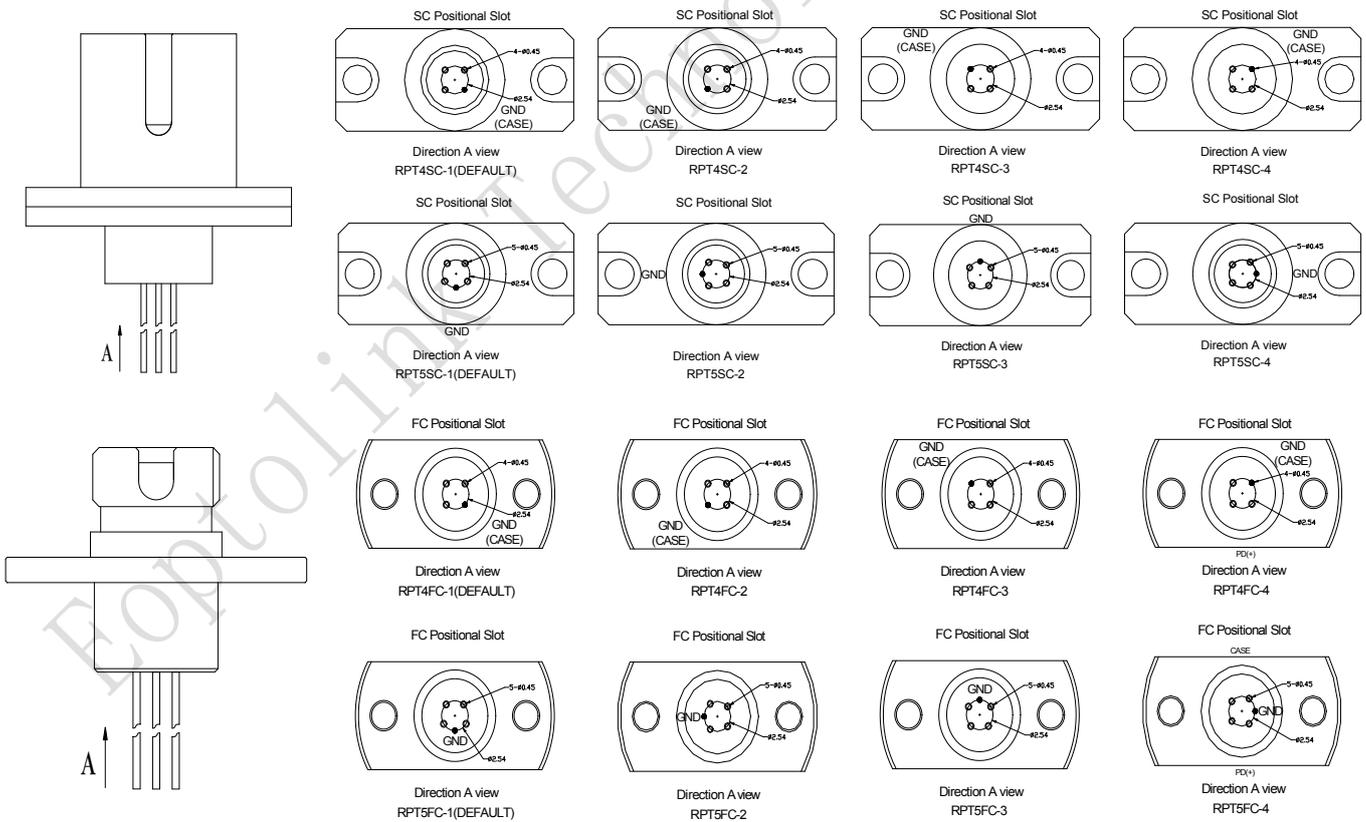

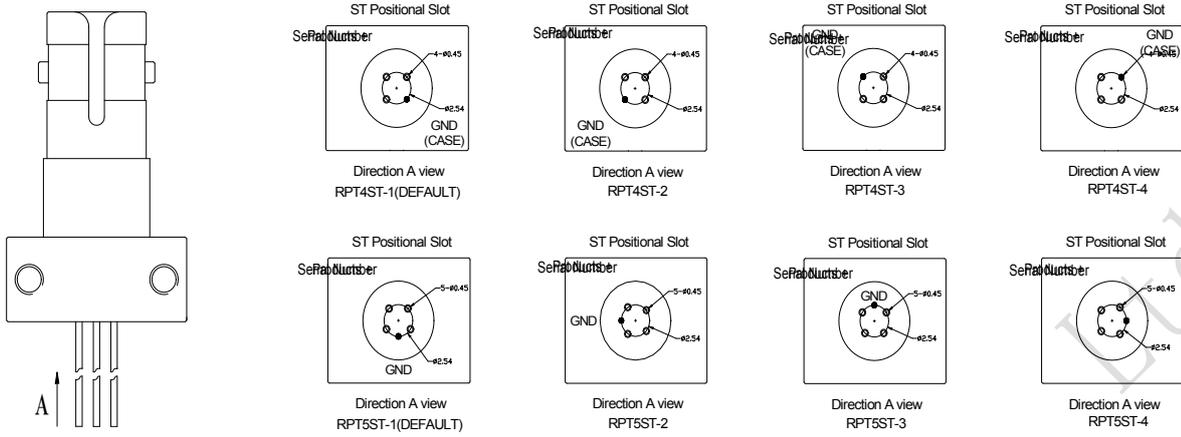

Nomenclature of assembly direction *Note3

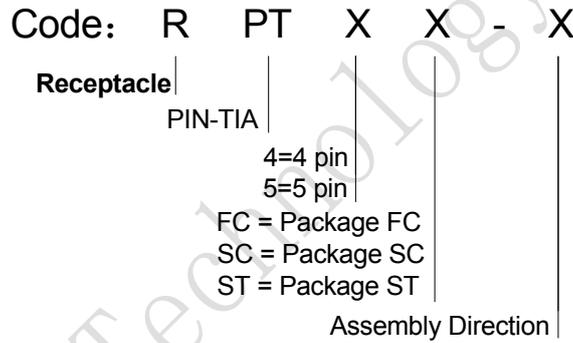

*Note3: Please designate the code of assembly direction.

Nomenclature



A	Date rate	9=2.5Gbps		
B	Wavelength	1=1270~1620nm		
C	Voltage	3=3.3V	5=5V	0=3.3/5V
D	Pin Type	0= pin-A	D= pin-D	E= pin-E
E	Package series	A=FC-1	B=FC-4	E=ST F=SC
F	Insulation	Blank=NO Insulation		J= Insulation

Precaution

- (1) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (2) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (3) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

Obtaining Document

You can visit our website:

<http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. listed at the end of the documentation to get the latest documentation.

Revision History

Verision	Initiated	Reviewed	Approved	Revision record	Release Date
Va-7	Zore.Zhao	Kelly.Cao Cathy.chen			2011-06-07
Va-8	Jack.Jiang	Zore.Zhao		Pin update	2014-12-17

Notice:

Eoptolink reserves the right to make changes or discontinue any product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

Add:IOT Industrial Park, Southwest Airport Economic Development Zone, Shuangliu County, Chengdu, Sichuan, China.

Tel: +86-28-67087999 ext.8081

Fax:+86-28-67087979

Postal: 610213

E-mail:sales@eoptolink.com

<http://www.eoptolink.com>