

GFLR-5xxxxx

1550nm MQW-FP Laser Diode Receptacle Module



Features

- ◆ Coaxial Package
- ◆ InGaAsP/InP MQW-FP laser Diode
- ◆ Data rate up to 2.5Gbps
- ◆ Low threshold, high slope efficiency and high output power LD
- ◆ Maximum Soldering Temperature/Time: 260°C/10s
- ◆ Operating Case temperature: -40°C to +85°C
- ◆ RoHS6 Compliant Products Available

Applications

- ◆ Digital Transmission System
- ◆ Test Equipments

General

GFLR-5xxxxxSeries are 1550nm InGaAsP/InP MQW-FP laser diode modules designed for fiber communication systems. These modules are transmitter optical sub-assembly with low threshold current and high performance at high temperature, which are ideally suitable for short reach applications.

A laser diode is mounted into a coaxial package integrated with a single-mode fiber-stub, an isolator and an InGaAs monitor PD.

Ordering information (Standard version ^{*Note1})

Part No.	Package series	Pin Type	Isolator	Connector	Data rate
GFLR-5105A2	A	LD-Pin-2	N=None	FC-1	1.25Gbps
GFLR-5110B2G	B	LD-Pin-2	Single Stage	FC-2	1.25Gbps
GFLR-5210C1G	C	LD-Pin-1	Single Stage	FC-3	2.5Gbps
GFLR-5105D1	D	LD-Pin-1	N=None	FC-4	1.25Gbps
GFLR-5110E2	E	LD-Pin-2	N=None	ST	1.25Gbps
GFLR-5105F2	F	LD-Pin-2	N=None	SC	1.25Gbps
GFLR-5210F1G	F	LD-Pin-1	Single Stage	SC	2.5Gbps

*Note1: For more ordering information, please refer the nomenclature and contact EPOTOLINK sales.

Absolute maximum ratings ^{*Note2}

Parameter	Symbol	Ratings	Unit
Storage temperature	Tstg	-40~+100	°C
Operating case temperature	Top	-40~+85	°C
Forward current (LD)	IFD	150	mA
Reverse voltage (LD)	VrL	2	V
Reverse voltage (PD)	VrP	20	V
Reverse current (PD)	IrP	2	mA
Soldering temperature (<10s)	Stemp	260	°C


*Note2: Exceeding any one of these values may destroy the device permanently.

Electrical and optical characteristics


(Po=0.3mW, SMF, Tc=+25°C, unless otherwise noted.)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Threshold current	Ith	CW	—	8	15	mA
Fiber Coupling Power	Pf	CW, If=Ith+20mA	0.2	—	1.99	mW
Operating voltage	Vf	CW, Tc=-40~+85°C	—	1.2	1.6	V
Slope Efficiency	Se	CW, Average(Ith to Ith+20mA)	—	—	0.08	mW/mA
Peak wavelength	λ_p	CW	1520	1550	1580	nm
		CW, Tc=-40~+85°C	1490	—	1585	nm
Spectral width	$\Delta\lambda$	CW, RMS	—	1.5	3	nm
Rise time	tr	Ib=Ith, 10-90%, Tc=-40~+85°C	—	—	0.7	ns
Fall time	tf	Ib=Ith, 10-90%, Tc=-40~+85°C	—	0.15	0.7	ns
Tracking error	ΔPf	Im hold(@Pf=0.16mW(25°C)) CW, Tc=-40~+85°C	-1.5	—	1.5	dB
Monitor current	Im	CW, VrP=5V, Tc=-40~+85°C	0.1	—	1	mA
Monitor dark current	Id	VrP=5V	—	—	100	nA
Monitor capacitance	C	VrP=5V, f=1MHz	—	—	20	pF
Connector repeatability	—	—	-1	—	1	dB
Optical Isolation	—	Single Stage	30	—	—	dB
	—	Dual Stage	40	—	—	

Package dimension

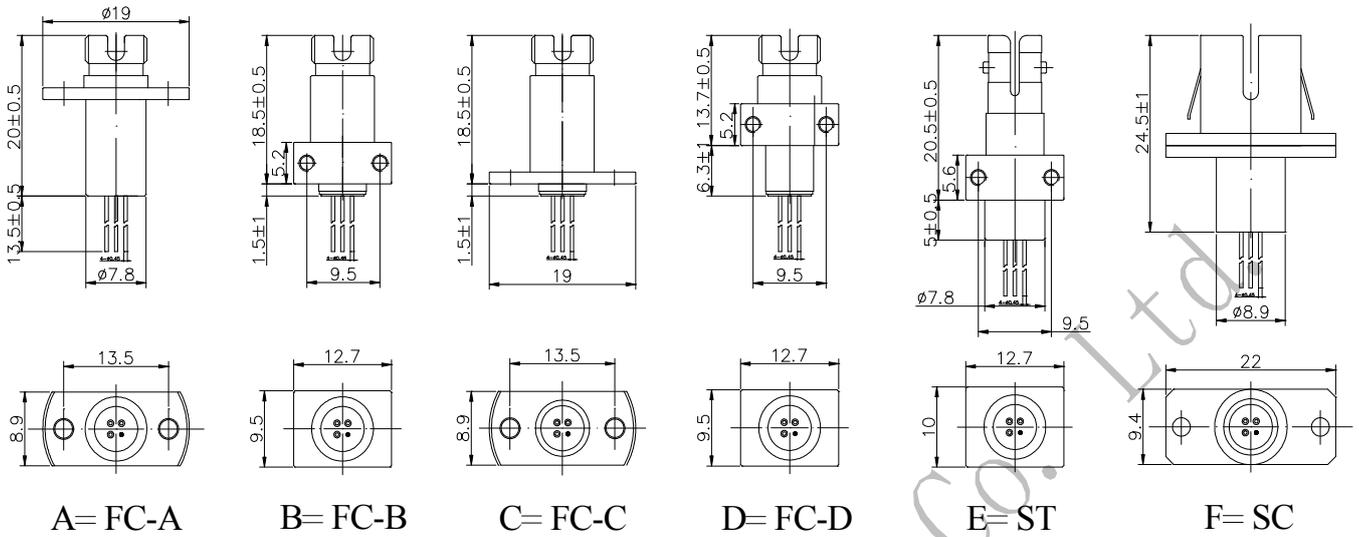


The direction of fix card

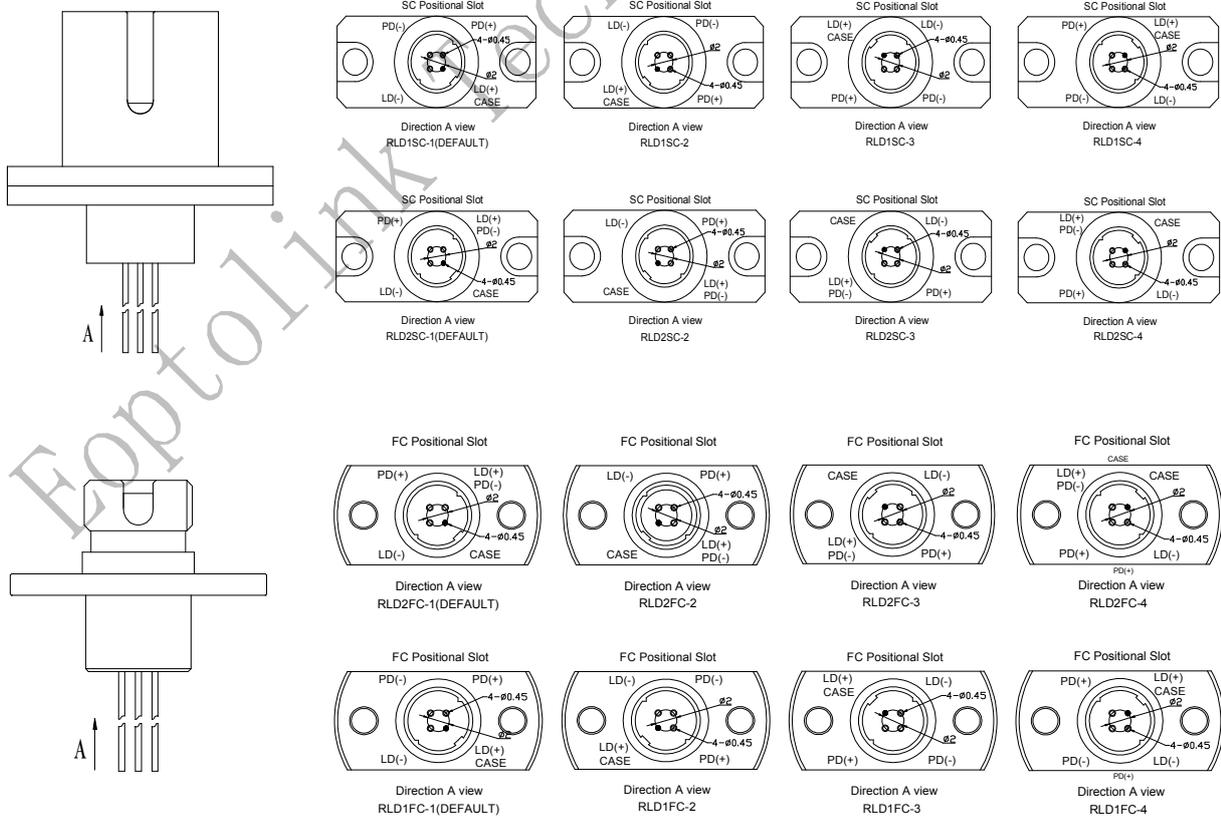

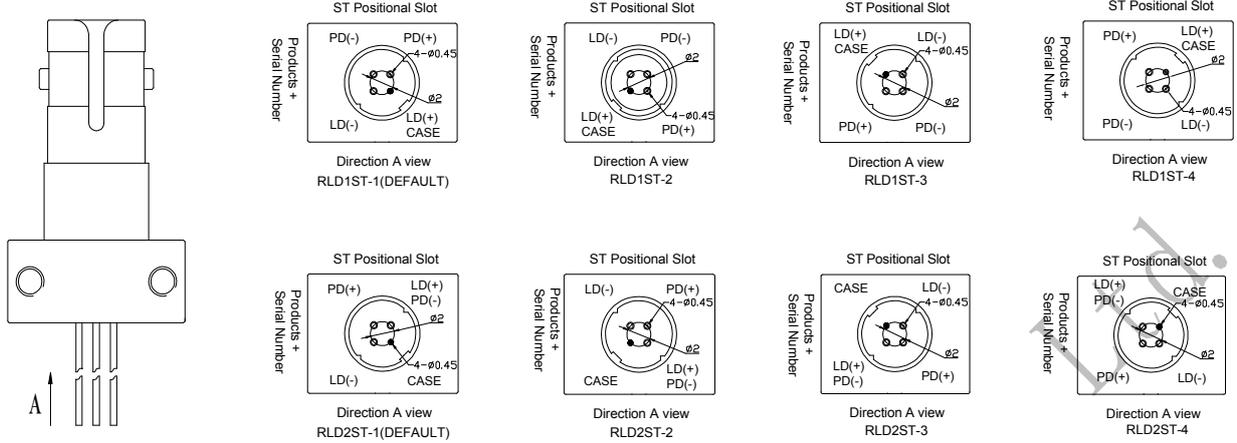


Nomenclature of assembly direction *Note3

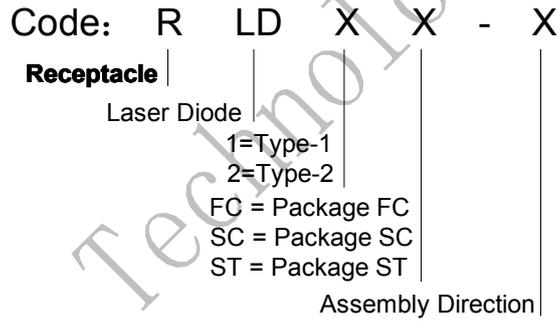

*Note3: Please designate the code of assembly direction.

Pin Assignment

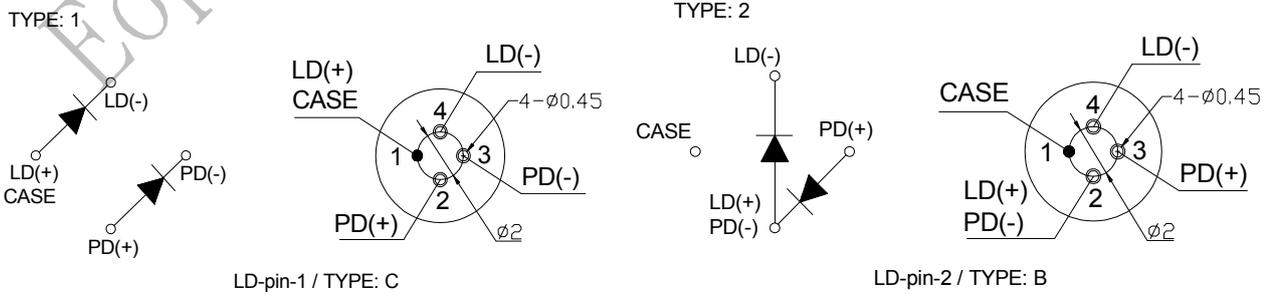

Nomenclature

G F L R —
 A B C D E F

Order	Parameter	Detailed Description					
A	Center Wavelength	5=1550					
B	Data rate	1=1.25Gbps			2=2.5Gbps		
C	Power	05=0.2-0.99mW			10=1-1.99 mW		
D	Package series	A=FC-A	B=FC-B	C=FC-C	D=FC-D	E=ST	F=SC
E	Pin Type	1=LD-pin-1			2=LD-pin-2		
F	Isolator	Blank=None		G= Single Stage		G2=Dual Stage	
G	Fiber Type	Blank=SM			M=MM		

Precaution

- (1) The modules should be handled in the same manner as ordinary semiconductor devices to prevent the electro-static damages. For safe keeping and carrying, the modules should be packaged with ESD proof material. To assemble the modules on PCB, the workbench, the soldering iron and the human body should be grounded.
- (2) Please pay special attention to the atmosphere condition because the dew on the module may cause some electrical damages.
- (3) Under such a strong vibration environment as in automobile, the performance and reliability are not guaranteed.

Obtaining Document

You can visit our website:

<http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. listed at the end of the documentation to get the latest documentation.

Revision History

Verision	Initiated	Reviewed	Approved	Revision History	Release Date
Va-5	Zore.Zhao	Kelly.Cao			2010-4-6
Vb-1	Jack.Jiang	Zore.Zhao		Replaced"Pack age dimension"	2011-9-15

Notice:

Eoptolink reserves the right to make changes or discontinue any product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

Add: Floor 5, Building 2, No. 21 Gaopeng Avenue, High-Tech District, CHENGDU, SICHUAN 610041 P.R.
CHINA

Tel: (+86) 028-85122709 ext 816 & 809

Fax: (+86) 028-85121912

Postal: 610041

E-mail: sales@eoptolink.com

<http://www.eoptolink.com>

Eoptolink Technology Co., Ltd.